

Standard casing colours RS Universal

Colour closest to RAL*



	RAL 9001 Cream	RAL 9010 Pure white	RAL 9016 Traffic White	CO - natural (anodised)	RAL 9006 White aluminium	RAL 7016 Anthracite gray	Tiger 29/80081 Iron Glimmer (structural)	STR 7516 Anthracite gray
RS Universal 85 45°	•	•	•	•	•	•	•	•
RS Universal 85 half-round	•	•	•	•	•	•	•	•
RS Universal 85 square	•	•	•	•	•	•	•	•
RS Universal 95 45°	•	•	•	•	•	•	•	•
RS Universal 95 square	•	•	•	•	•	•	•	•
RS Universal 95 round	•	•	•	•	•	•	•	•
RS Universal 105 45°	•	•	•	•	•	•	•	•
RS Universal 105 square	•	•	•	•	•	•	•	•
RS Universal 120 half-round	•	•	•	•	•	•	•	•
RS Universal 120 closed	•	•	•	•	•	•	•	•
RS Universal 125 45°	•	•	•	•	•	•	•	•
RS Universal 125 square	•	•	•	•	•	•	•	•



Your supplier of sun protection systems



RS Universal


The RS Universal is an elegant and modern product. It consists of a box with integrated side guide rails, covered with a durable fibreglass and PVC fabric which can withstand adverse weather conditions, including gusty winds, hail and rain.

Additionally, the fabrics used provide optical comfort inside the building. This is achieved by not darkening the environment and also blocking intense sunlight.




RS Universal 85


RS Universal 85 45°

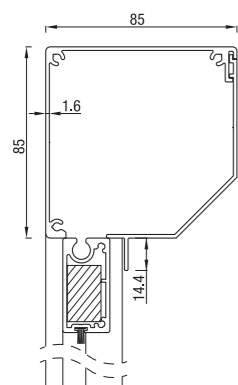

RS Universal 85 half-round

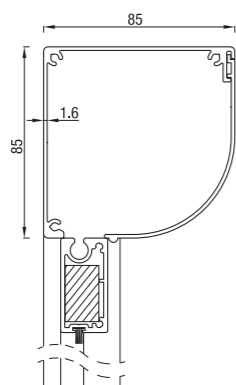

RS Universal 85 square

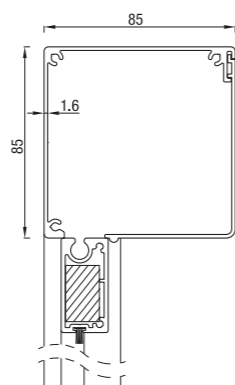


	Maximum width (cm)	height (cm)	area (m ²)
RS Universal 85	300	200	6,0


RS Universal 85 is available with crank or motor control

RS Universal 95


RS Universal 95 45°

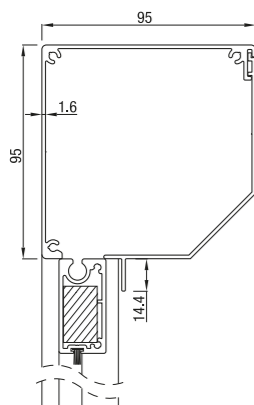

RS Universal 95 square

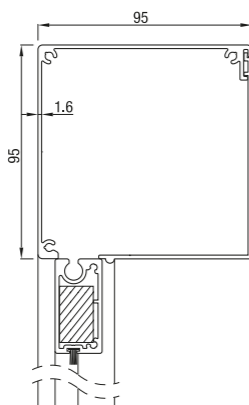

RS Universal 95 round

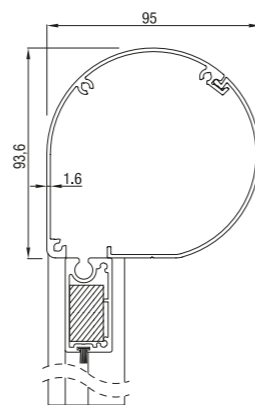


	Maximum width (cm)	height (cm)	area (m ²)
RS Universal 95	350	280	7,9


RS Universal 95 is available with crank or motor control.

RS Universal 105

RS Universal 105 45°

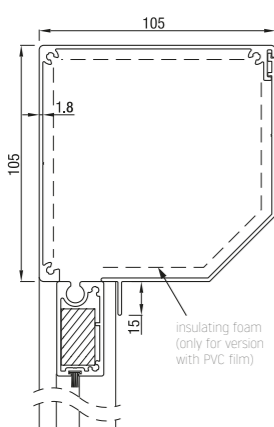

RS Universal 105 square

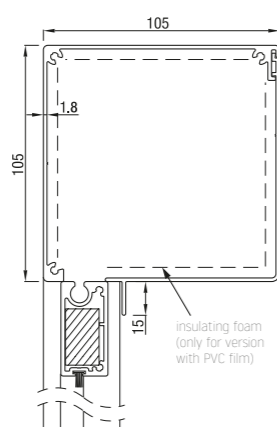


	Maximum width (cm)	height (cm)	area (m ²)
RS Universal 105	350	280	7,9


RS Universal 105 is available with crank or motor control

RS Universal 120 / 125


RS Universal 120 half-round

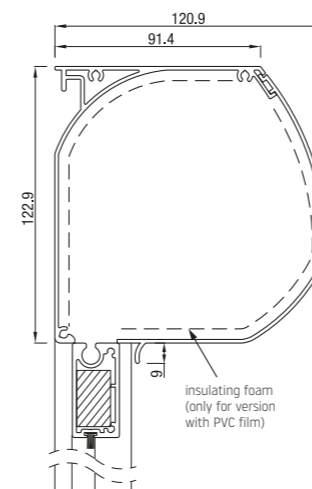


RS Universal 120 closed

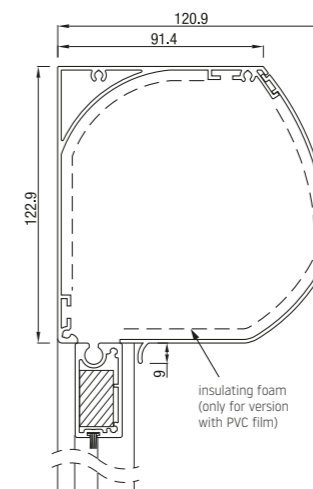

RS Universal 125 45°

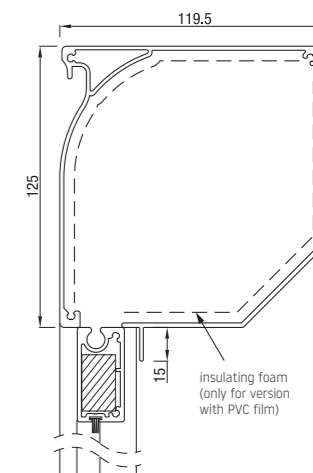


RS Universal 125 square

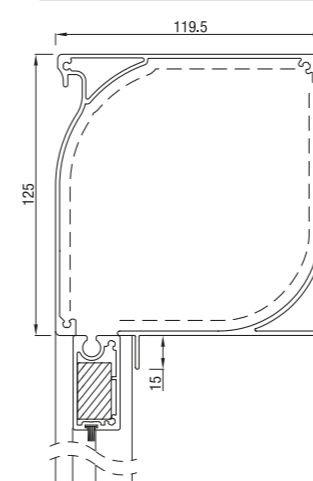

PVC film options


Option 1*

Film in the middle. The minimum fabric size below, above and on sides is 11.5 cm.



Option 2*

Film over the entire surface








*Maximum film dimensions 4x3 m

	Maximum width (cm)	height (cm)	area (m ²)
RS Universal 105	450	350	14,0

RS Universal 120 and RS Universal 120 are available with crank or motor control.

Guide rails

End slat



UNIVERSAL 2-PART GUIDE RAIL